

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Patrick A. Zebedee et al.

Serial No. Unknown

Filed: Herewith

For: SHIFT REGISTER

Art Unit: Unknown


Examiner: Unknown

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which
priority is claimed for this case:

Country: Great Britain
Application Number: 0301789.4
Filing Date: January 25, 2003


SIGNATURE OF ATTORNEY

Reg. No. 26,725

Neil A. DuChez

Tel. No. (216) 621-1113 **RENNER, OTTO, BOISSELLE & SKLAR, LLP**
1621 Euclid Avenue
Nineteenth Floor
Cleveland, Ohio 44115

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

22264 U.S. PTO
10/760576



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Stephen Hordley

Dated 26 November 2003

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

JSR.P52358GB

2. Patent application number

(The Patent Office will fill in this part)

0301789.4

25 JAN 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Sharp Kabushiki Kaisha
22-22 Nagaike-cho
Abeno-ku, Osaka 545
Japan

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Japan

50722925001

4. Title of the invention

"Shift Register"

5. Name of your agent (if you have one)

Marks & Clerk

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

4220 Nash Court
Oxford Business Park South
Oxford OX4 2RU
United Kingdom

Patents ADP number (if you know it)

7271125001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number

Date of filing

(if you know it)

(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing

(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	19
Claim(s)	4
Abstract	1
Drawing(s)	23

23 *ph* *1 set*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

1

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

John S. Robinson

Date

Marks & Clerk

24 January 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

John S. Robinson - 01865 397900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

SHIFT REGISTER

The present invention relates to a shift register. Such a register may, for example, be used in drive circuits for display devices to generate row and/or column select signals in active matrix displays. The present invention also relates to a driver for an active matrix device including such a register, an active matrix device including such a driver, and a display such as a liquid crystal display.

Figure 1 of the accompanying drawings illustrates a typical active matrix display, for example of the liquid crystal type, comprising an active matrix 1 of N rows and M columns of picture elements (pixels). The columns are connected to M column electrodes which are connected to a data line driver 2 including an M-phase clock generator. The rows are connected to N row electrodes which are connected to a scan line driver 3 including an N-phase clock generator. In a typical display of this type, the M-phase clock generator is required to produce clock pulses at the data rate so as to sample incoming data for refreshing the active matrix 1 a row at a time. The N-phase clock generator is required to produce pulses at a scan rate so as to drive the scan lines one at a time for refreshing the active matrix 1 row by row.

Normal operation of a display of this type is such that the data are sampled to the data lines from left to right and the scan lines are driven from the top to the bottom of the active matrix 1. It is desirable to reduce or minimise the area occupied by the drivers 2 and 3. For example, when these drivers are integrated on the display substrate of a panel display, this allows a smaller bezel size to be used for the panel. Alternatively or additionally, this allows the integration of additional circuits without having to increase the panel size.

In some applications, it is desirable to be able to reverse the order of data and/or scan pulses such that the data are sampled to the data lines from right to left and/or such that the scan lines are driven from the bottom to the top of the active matrix 1. For example, this allows an image to be inverted, reflected or rotated without the need for extra memory in a data buffer supplying image data to the display and without the risk of

image distortion. A common application of such an arrangement is to allow rotation of a display panel after manufacture to give a better fit in a host device.

A known type of multi-phase clock generator suitable for use in the drivers 2 and 3 of Figure 1 comprises a shift register in the form of cascaded D-type flip-flops. The shift register is controlled by a clock so as to pass a single stored logic state along the chain of flip-flops. For example, Figure 2 illustrates an example of the waveforms appearing at five outputs OUT1 to OUT5 of such a shift register. The five phase clock pulses appear in sequence on the outputs and do not overlap with each other. Figure 3 of the accompanying drawings illustrates an alternative arrangement in which there is an overlap between consecutive pairs of clock pulses.

Figure 4 of the accompanying drawing illustrates another type of shift register suitable for such an application and disclosed in GB2 345 207. In this simplified example, the shift register comprises five stages with each stage comprising a reset-set flip-flop (11 - 15) and a gate circuit (16 - 20), which receives complementary clock pulses CK and CKB. Each gate circuit has complementary inputs G and GB for receiving complementary outputs Q and QB from the flip-flop (RSFF) of the same stage and has complementary clock inputs CK and CKB. In the first, third and fifth stages, the gate clock inputs CK and CKB receive the clock signals CK and CKB, respectively whereas, in the second and fourth stages, the clock inputs CK and CKB receive the clock signals CKB and CK, respectively.

In the intermediate stages of the shift register, the output O of the gate circuit comprises the output of the shift register and is also supplied to the re-set input R of the flip-flop of the preceding stage and to the set input S of the flip-flop of the succeeding stage. When enabled, the gate circuits 16, 18, 20 of the first, third and fifth stages supply a high state to their outputs O in response to a rising edge of the clock signal CK whereas the gate circuits 17 and 19 of the second and fourth stages respond to a falling edge of the clock signal CK.

During operation, for example when the flip-flop 12 of the second stage is set, its direct or non-inverting output Q is at a logic high level whereas its inverted or complementary output QB is at a logic low level so that the gate circuit 17 is enabled. In response to the arrival of the next falling edge of the clock signal CK, the gate circuit 2 passes a high state to its output (O), which sets the flip-flop 13 and re-sets the flip-flop 11. The flip-flop 13 enables the gate circuit 18 which in turn sets the flip-flop 14 and re-sets the flip-flop 12 at the next rising edge of the clock signal CK.

The output signals produced by the shift register shown in Figure 4 form a multi-phase clock with overlapping between consecutive output pulses. Depending on the application of the shift register, this overlapping may be exploited or removed.

A shift register of this type may be made bi-directional by controlling the direction of passage of the set and re-set signals, for example using transmission gates. However, this requires extra transistors and an up/down control line extending along the length of the shift register.

US5 410 583, US6 339 631 and US6 345 085 disclose an alternative arrangement in which an input multi-phase clock signal is supplied to a shift register arrangement with each stage passing one of the clock signals to its output. Each stage is enabled by the output of the preceding stage and is disabled by another of the clocks. Such arrangements are relatively compact but rely on nMOS pass transistors which, depending on the integration technology used, may have to be replaced with complementary transmission gates, thus increasing the size of such a shift register. No technique for providing bi-directional operation is disclosed.

US5 859 630 discloses a similar type of arrangement which is capable of bi-directional operation. The order in which clock pulses appear on the multi-phase clock inputs determines the shifting direction of the shift register. Although this technique does not require transmission gates for controlling the direction of shifting, each stage is more complex in that it requires two parallel control circuits controlling a single transistor to

pass a signal. Also, each stage is required to be connected to the preceding two stages and the succeeding two stages so that extra connections are required.

According to a first aspect of the invention, there is provided a shift register comprising X stages, where X is an integer greater than 3, and Y clock inputs, where Y is an integer greater than 2, each stage comprising a reset-over-set flip-flop circuit as defined hereinafter, each x th stage being arranged to receive set signals from the $(x-1)$ th stage where $1 < x < X$, and each $(nY+y)$ th stage being arranged to receive a reset signal from the y th clock input, where $0 < y \leq Y$ and n is a non-negative integer.

The term "reset-over-set flip-flop circuit" as used herein is defined to mean any circuit which operates as a flip-flop in which resetting has priority over setting. Thus, when an active reset signal is present at a reset input, the flip-flop is or remains reset irrespective of the state of a signal at a set input. When an active setting signal is received at the set input, the flip-flop is only set in the absence of an active reset signal at the reset input (which is equivalent to an inactive reset signal at the reset input).

The first stage may be arranged to receive a start pulse from a start pulse input.

The reset-over-set flip-flop circuit may comprise a reset-set flip-flop and, an AND gate having an output connected to a set input of the flip-flop, a first input connected to the y th clock input and a second input connected to output of the $(x-1)$ th stage.

The reset-over-set flip-flop circuit may have a complementary reset input connected to the y th clock input.

Each of the stages may comprise a level shifter for shifting the level of the reset signal.

The register may comprise a clock signal generator having Y multi-phase outputs connected to the Y clock inputs, respectfully. The clock generator may be arranged to supply multi-phase clock signals with the clock signals of pairs of adjacent phases

overlapping each other. The clock signals of non-adjacent phases may be non-overlapping.

Each x th stage may be arranged to receive set signals from the $(x+1)$ th stage. The X th stage may be arranged to receive a start pulse from the start pulse input. The reset-over-set flip-flop circuit may comprise an OR gate having an output connected to the second input of the AND gate and inputs connected to the outputs of the $(x-1)$ th and $(x+1)$ th stages.

The clock signal generator may be controllable to supply clock pulses in sequence to the first to Y th clock inputs, respectively, or to the Y th to first clock inputs, respectively.

The clock signal generator may be controllable to supply inactive clock signals simultaneously to the clock inputs.

The clock signal generator may be controllable to supply active clock signals simultaneously to the clock inputs.

The register may comprise an arrangement for converting overlapping output pulses from the stages to non-overlapping pulses. The arrangement may comprise; a pulse generator for producing timing pulses each of which has a rising edge after the rising edge of a respective output signal of the register and a falling edge before the falling edge of the respective output signal; and X logic circuits, each x th of which is arranged to perform a logical AND operation on an output of the x th stage and the timing pulses. The rising edge of each timing pulse may occur after the falling edge of the output signal preceding the respective output signal and the falling edge of each timing pulse may occur before the rising edge of the output signal following the respective output signal.

As an alternative, the arrangement may comprise a plurality of logic circuits, each x th of which is arranged to perform a logical AND operation on a direct output of the x th stage and inverted outputs of the $(x-1)$ th and $(x+1)$ th stages. As a further alternative, the

arrangement may comprise a plurality of logic circuits, each xth of which is arranged to perform a logical AND operation on a direct output of the xth stage and an inverted output of the $(x-1)$ th or $(x+1)$ th stage.

The register may comprise an arrangement for converting output pulses from the stages to groups of simultaneous pulses. The arrangement may comprise: a pulse generator for generating timing pulses, each of which overlaps with the output pulses of a respective group of the stages; and X logic circuits, each xth of which is arranged to perform a logical AND operation on the output pulse of the xth stage and the timing pulses. The rising edge of each timing pulse may occur after the rising edges of all of the output signals of the respective group and the falling edge of each timing pulse may occur before the falling edges of all of the output signals of the respective group.

Y may be equal to 3.

The register may comprise a CMOS integrated circuit.

According to a second aspect of the invention, there is provided a driver for an active matrix device, comprising a register according to the first aspect of the invention.

According to a third aspect of the invention, there is provided an active matrix device comprising at least one driver according to the second aspect of the invention.

The device may comprise a liquid crystal display.

It is thus possible to provide a shift register of relatively compact size, for example requiring less integrated circuit area than for known shift registers. In bi-directional embodiments, there is no need for multiplexers to control signal direction and hence no need for connections to control such multiplexers. Each flip-flop circuit is required to supply one output to one or each of its neighbouring stages only. Further, it is not necessary to duplicate large circuit blocks in order to provide bi-directional shifting.

Depending on the number of stages of the shift register, it may not be necessary to control which end is connected to receive a start pulse. Provided the first and last stages are connected to different clock inputs, both stages may receive the start pulse and correct operation in either direction of shifting is achieved. If the first and last stages are connected to the same clock input, the start pulse may be switched between them depending on the shifting direction or a dummy stage may be added to either or both ends of the shift register.

In embodiments where it is desirable to control overlapping of shift register output pulses, this may be achieved by adjusting the clock signals without the need for extra logic circuitry in the register itself. Similar techniques may also be used to control the resolution of a display when the shift register is used in one or more driver circuits of a display. In many embodiments, no asynchronous reset arrangement is necessary as this may be achieved by supplying the appropriate clock signals.

The invention will be further described, by way of example, with reference to the accompanying drawings, in which;

Figure 1 is a block schematic diagram of an active matrix liquid crystal display;

Figures 2 and 3 are timing diagrams illustrating output signals of a known type of shift register;

Figure 4 is a block schematic diagram of a known type of shift register;

Figure 5 is a block schematic diagram of a shift register constituting an embodiment of the invention;

Figures 6 and 7 are timing diagrams illustrating waveforms occurring in the shift register of Figure 5 for forward and reverse operations;

Figure 8 is a timing diagram illustrating a four-phase clock for alternative embodiments of the invention;

Figure 9 is a block schematic diagram of a shift register constituting another embodiment of the invention;

Figure 10 is a block schematic diagram of a shift register constituting a further embodiment of the invention;

Figure 11 is a circuit diagram of one of the stages of the shift register shown in Figure 10;

Figure 12 is a circuit diagram of another type of stage which may be used in the shift register of Figure 10;

Figure 13 is a circuit diagram of yet another type of stage which may be used in the shift register of Figure 10;

Figure 14 is a block schematic diagram of a shift register constituting another embodiment of the invention;

Figure 15 is a circuit diagram of one of the stages of the shift register of Figure 14;

Figure 16 is a circuit diagram of another type of stage which may be used in the shift register of Figure 14;

Figure 17 is a simplified block schematic diagram of a shift register constituting another embodiment of the invention;

Figure 18 is a timing diagram illustrating waveforms occurring in the shift register of Figure 17;

Figure 19 is a simplified block diagram of a shift register constituting a further embodiment of the invention;

Figure 20 is a block schematic diagram of a shift register constituting yet another embodiment of the invention;

Figure 21 is a timing diagram illustrating waveforms occurring in a shift register which does not require a separate asynchronous reset input and which provides data line precharging;

Figure 22 is a timing diagram illustrating waveforms occurring in a shift register for use in multi-resolution displays; and

Figure 23 is a block schematic diagram of a shift register constituting yet another embodiment of the invention.

Like reference numerals refer to like parts throughout the drawings.

A standard RS flip-flop with active high reset R and set S inputs operates in accordance with the following truth table:

R	S	Q_n
0	0	Q_{n-1}
0	1	1
1	0	0
1	1	X

where X is an undefined or disallowed state, 0 is the logic low level, 1 is the logic high level, Q_n is the output state, and Q_{n-1} is the previous output state.

A reset-over-set flip-flop with active high reset and set inputs operates in accordance with the following truth table:

R	S	Q_n
0	0	Q_{n-1}
0	1	1
1	0	0
1	1	0

The embodiments disclosed herein make use of an active low reset active high set reset-over-set flip-flop and such circuits operate in accordance with the following truth table:

RB	S	Q_n
0	0	0
0	1	0
1	0	Q_{n-1}
1	1	1

Reset-over-set flip-flops may be embodied in many different ways and various examples are disclosed herein.

For the purposes of illustration and without any loss of generality, Figure 5 illustrates a five stage shift register controlled by a three phase clock. The first to fifth stages 31 to 35, respectfully, are in the form of reset-over-set flip-flops and comprise reset-set flip-flops (RSFF) 36 to 40, respectively, AND gates 41 to 45, respectively, OR gates 46 to 50, respectively, and a clock signal generator 51. The shift register has three clock inputs CK1, CK2 and CK3 connected to corresponding multi-phase clock outputs of the clock signal generator 51 and a start pulse input SP connected to a corresponding output of the generator 51.

The flip-flops 36 to 40 have non-inverting or direct outputs Q which form the outputs OUT1 to OUT5 of the shift register. Each flip-flop has a set input S connected to the output of the AND gate of that stage and a complementary or inverted (active low) reset input RB connected to the appropriate clock input. In particular, the inverted reset

inputs of the flip-flops 36 and 39 of the first and fourth stages are connected to the first clock input CK1, the inverted reset inputs of the flip-flops 37 and 40 of the second and fifth stages are connected to the second clock input CK2; and the inverted reset input of the flip-flop 38 of the third stage is connected to the third clock input CK3. In general, for a shift register having Y clock inputs, each $(nY+y)$ th stage shift register reset input is connected to the y th clock input, where $0 < y \leq Y$ and n is a non-negative integer. In practice, a minimum of three multi-phase clock inputs is required for correct operation of the bi-directional shift register.

The inputs of the AND gate of each stage are connected to the output of the OR gate of the stage and to the inverted reset input of the flip-flop of that stage. The inputs of the OR gate of each intermediate stage are connected to the outputs of the preceding and succeeding stages, respectively. In the first stage 31, the inputs of the OR gate 36 are connected to the output of the second stage 32 and to the start pulse input SP. Conversely, the inputs of the OR gate 50 of the final stage 35 are connected to the output of the preceding stage 34 and to the start pulse input SP.

Figures 6 and 7 are timing diagrams illustrating waveforms occurring at various circuit nodes of the shift register of Figure 5 for shifting in the forward and reverse directions, respectively. As shown in Figure 6, a start pulse is supplied to the start pulse input SP and a first clock pulse, which overlaps with the start pulse, is supplied to the first clock input CK1. The flip-flop 36 of the first stage 31 is thus set to supply an output pulse at its output OUT1. The output high logic level signal is supplied to the OR gate 47 of the next stage 42 but this stage remains reset because of the low logic level of the second clock input CK2.

When the second clock input CK2 switches to the high logic level, resetting of the second flip-flop 37 is disabled and the flip-flop 37 is set via the OR gate 47 and the AND gate 42. Its output Q therefore rises. When the first clock input CK1 switches to the low logic level, the flip-flop 36 of the first stage 31 is reset and its output switches to the low logic level to mark the end of the output pulse of the first stage.

This operation is repeated so that effectively the start pulse is shifted from stage to stage in the shift register by each clock pulse with the corresponding output pulses overlapping as illustrated in Figure 6. In particular, consecutive pairs of output pulses overlap with each other but non-consecutive pairs of output pulses do not overlap. The rising and falling edges of each output pulse are triggered by the rising and falling edges of a clock pulse.

Figure 7 illustrates the signals occurring for operation of the shift register in the reverse direction. In this case, the first clock pulse which enters the start pulse in the flip-flop 40 of the fifth or last stage 35 is the second clock input CK2. The order of clock pulses is the reverse of that shown in Figure 6 so that, in each intermediate stage, for the reverse shifting direction, each flip-flop is set by the adjacent higher ordered stage and reset by the adjacent lower ordered stage so that the start pulse is shifted progressively from the last stage 35 to the first stage 31 in synchronism with the clock pulses.

The overlap of the clock signals must be sufficient for each stage to be set before the previously set stage is reset. Also, the start pulse must overlap the active edge of the first clock pulse but must not overlap any subsequent clock pulse active edges.

The shift register requires a minimum of three clock inputs and three clock phases but more than three phases may be provided. Figure 8 illustrates a four phase clock which may be used with a shift register in which the reset inputs of each fourth stage are connected to the same clock input with the first to fourth, fifth to eighth, ninth to twelfth, etc stages being connected to the clock inputs CK1 to CK4, respectively. Reversing the order of the clock phases and supplying the first clock pulse to the last stage causes shifting in the reverse direction as described hereinbefore.

The shift register shown in Figure 9 differs from that shown in Figure 5 in that each of the flip-flops 36 to 40 comprises a reset-over-set flip-flop so that the AND gates 41 to 45 are unnecessary and are omitted. A logic low level signal on each inverted reset input RB of the flip-flops 36 to 40 resets the stage and prevents it from being set. A

high logic level signal on the set input S only sets the stage if it coincides with a high logic level on the reset input RB of the stage.

Figure 10 illustrates a shift register in which the functionality of the OR gates 46 is incorporated in the flip-flops by way of enable inputs EN1 and EN2. Figure 11 illustrates a typical stage 31 of the shift register of Figure 10 in more detail. The stage is embodied by complementary insulated gate metal oxide semiconductor thin film transistors comprising n-type transistors 60 to 65 and p-type transistors 66 to 69. The gates of the transistors 60 and 61 are connected to the enable inputs EN1 and EN2, respectively. The sources of the transistors 60 and 61 are connected to a negative supply line vss whereas the drains of these transistors are connected to the source of the transistor 62. The clock input CK is connected to the gates of the transistors 62, 66, 63 and 68. The drain of the transistor 66 is connected to the drain of the transistor 62 and the source of the transistor 66 is connected to a positive supply line vddd.

The drains of the transistors 62 and 66 are connected to the drains of the transistors 64 and 67, the gates of the transistors 65 and 69, and to the inverted output QB. The transistors 63, 64, 67 and 68 are connected in series between the supply lines vss and vddd. The transistors 64 and 67 operate as a complementary inverter.

The transistors 65 and 69 are arranged in series between the supply lines vss and vddd and operate as a complementary inverter. The drains of the transistors 65 and 69 are connected to the gates of the transistors 64 and 67 and to the direct output Q. The flip-flop is thus arranged as a cross-connected pair of invertors with an input gating arrangement.

Figure 12 illustrates another example of a stage 31 which is suitable for use in the shift register shown in Figure 10. This stage is suitable for use with low voltage active-low clock signals and includes a single-ended level shifter for the clock signals CKB.

The stage shown in Figure 12 also comprises a complementary inverter formed by the transistors 65 and 69. Also, the enable inputs EN1 and EN2 are supplied to the gates of

n-type transistors 60 and 61, respectively. The sources of the transistors 60 and 61 and of a further n-type transistor 70 are connected to the inverted clock input CKB whereas the drains of these transistors are connected to the gates of the transistors 65 and 69 and to the drain of a transistor 71, whose gate is connected to the negative supply line vss and whose source is connected to the positive supply line vddd. The gate of the transistor 70 is connected to the output Q.

When a logic high level is present on either of the enable inputs EN1 and EN2, the flip-flop is set by a logic low level at the clock input CKB and the output Q switches to the high logic level. This is maintained by the feedback from the output Q to the gate of the transistor 70 so that the state is maintained when the enable signals are absent. When the clock signal CKB switches to the high logic level, the flip-flop is reset. The output Q may be buffered before being fed back to the transistor 70 of the level shifter. Only one clock signal (and not its complement) is required and a high logic level clock signal ensures resetting of the flip-flop so that no asynchronous resetting arrangement is required.

Figure 13 illustrates a stage 31 which functions in a similar way to the stage shown in Figure 12 but with the addition of an output inverter comprising transistors 72 and 73 and with the enable inputs and feedback signal being supplied to a three input NAND gate 75, whose output is connected to the gate of the transistor 70. This arrangement has the advantage that the level shifter is better balanced. In particular, there is only one pull-down transistor 70 whereas, in the arrangement of Figure 12, two pull-down transistors (70 and 61, or 70 and 60) could be operational at a time.

Figure 14 illustrates a shift register which differs from that shown in Figure 10 in that the flip-flops 36 to 40 have complementary clock inputs CK and CKB connected to three phase complementary clock inputs CK1, CK1B; CK2, CK2B; CK3, CK3B. The stage shown in Figure 15 differs from that shown in Figure 13 in that the inverter 72, 73 is omitted and the level shifter is a double-ended level shifter comprising the transistors 70 and 71 and, in addition, transistors 76, 77 and 78. The output of the gate 75 is connected to the gates of the transistors 76 and 77, whose sources are connected to the

negative supply line vss and the positive supply line vddd, respectively. The drains of the transistors 76, 77 and 78 are connected together and to the gates of the transistors 70 and 78. The source of transistor 78 is connected to the direct clock input CK. Such an arrangement has an advantage in that the level shifting operation is quicker and more robust to process variation than in the single-ended level shifter.

The stage 31 shown in Figure 16 includes two single-ended level shifters for use with low voltage complementary clock signals. Both set and reset functions are "active low" with a low logic level at the inverted clock input CKB setting the stage and a low logic level at the clock input CK resetting the stage if it is already set. An asynchronous reset OB is also required.

The asynchronous reset input OB is connected to the gate of the transistor 71 and to the gate of a transistor 80 whose source is connected to the negative supply line vss and whose drain is connected to the source of the transistor 72. The inverted output QB is connected to the gate of a transistor 82, whose source is connected to the positive supply line vddd and whose drain is connected to the gate of a transistor 81. The drain of the transistor 81 is connected to the direct output Q and the source is connected to the clock input CK. Cross-connected invertors are formed by the transistors 72, 73 and 65, 69 and a level shifting and OR arrangement is provided by the transistors 60 and 61, as described hereinbefore.

As described hereinbefore, the output pulses of the shift registers described hereinbefore overlap by approximately the same amount as the clock signals. Although this overlap may be exploited in the appropriate applications, it may be removed by the arrangement shown in Figure 17 for other applications requiring non-overlapping multi-phase clock signals such as the scan line driver 3 shown in Figure 1. This arrangement comprises a timing pulse generator 85 having an output PWC supplying pulses which act as pulse width control signals for determining the actual pulse widths of the individual phase outputs from the shift register. The output PWC is connected to first inputs of AND gates 86 to 90, whose second inputs are connected to the outputs of the flip-flops 36 to

40, respectively. The outputs of the gates 86 to 90 form outputs SL1 to SL5, respectively, and may be used to supply scan signals to an active matrix.

A timing diagram illustrating the operation of the arrangement shown in Figure 17 is given in Figure 18. Each shift register output OUT1 to OUT5 is ANDed with the signal PWC to provide multi-phase non-overlapping scan signals SL1 to SL6, respectively. The duration of the scan signals can be varied by varying the pulse width of the signal PWC and the timing pulse generator 85 may be controllable or programmable to permit selection of the scan pulse widths.

Figure 19 illustrates in simplified form an alternative arrangement for removing overlaps in order to provide non-overlapping scan line signals SL1 to SL5 of a similar type to that shown in Figure 18. In this case, the flip-flops 36 to 40 have direct and inverted outputs Q and QB and the direct output of each flip-flop is supplied to a first input of a respective AND gate 91 to 95, whose output supplies a respective scan line signal SL1 to SL5. Each gate 91 to 95 has second and third inputs connected to the QB outputs of the preceding and succeeding stages. This arrangement provides scan pulses which are non-overlapping and which have non-overlapping edges.

Figure 20 illustrates a modification to the arrangement shown in Figure 19, in which each of the gates 91 to 95 has two inputs with the second input being connected to the inverted output QB of the flip-flop of the succeeding stage. Such an arrangement produces scan pulses which are substantially non-overlapping but which have coincident edges.

In many of the embodiments described hereinbefore, asynchronous resetting is unnecessary and the clock signal generator 51 can be arranged to supply a predetermined logic level to all of the clock inputs so as to reset all of the flip-flops 36 to 40. In particular, setting all of the clock inputs to the inactive state simultaneously may be used for resetting, for example prior to beginning a scanning cycle in a scan line driver or prior to beginning a row refresh cycle in a data line driver. Conversely, setting all of the clock inputs simultaneously to the active state at the same time as a start pulse

may be used to set all of the stages as illustrated in Figure 21. All of the stages may then be reset as described above. This may be used, for example, in a data line driver to precharge all of the data lines to an intermediate data value at the start of each new line or row refresh cycle. The clock signal generator 51 may be arranged to perform these functions automatically, selectively, or in accordance with programming.

The embodiments described hereinbefore producing overlapping pulses may be used to provide display drivers which are capable of providing a multi-resolution function. This may be achieved without requiring additional circuitry by altering the pulse widths of the clock pulses at the clock inputs supplied by the clock signal generator 51. This is illustrated in the upper part of Figure 22.

In a high resolution mode of operation, the shift register is operated as described hereinbefore, for example, with reference to Figures 6 and 7, such that there is a relatively small overlap between the output signals of the shift register. The resolution may be reduced by supplying extended clock pulses CK1 to CK3 as shown in the upper part of Figure 22 and, in this particular example, the shift register outputs are effectively activated in pairs. If both data and scan drivers are operated in this mode, then display resolution may be reduced to a quarter, for example to change from VGA to QVGA. In this case, the overlap between pairs of output pulses is extended such that, for example, there is a substantial overlap of the output pulses OUT1 and OUT2. When used in a data line driver, the data to be latched must be held constant across the falling edges of both output pulses OUT1 and OUT2 and must then change before the falling edges of the output signals OUT3 and OUT4. By adopting this timing, the items of data are latched onto pairs of data lines.

The technique illustrated in Figure 22 may be used with the arrangement illustrated in Figure 17 such that the pairs of output pulses have the same timing and the falling edges of each pair occur before the rising edges of the next pair. The lower part of Figure 22 illustrates how this may be achieved with the signals illustrated in the upper part and with the PWC signal from the timing pulse generator 85 having the illustrated waveform.

The embodiments described hereinbefore are bi-directional and are capable of shifting a start pulse towards the first stage or towards the last stage of the shift register depending on the order of the clock pulses supplied by the generator 51. However, it is also possible to provide a uni-directional shift register and Figure 23 shows an example of this. This shift register is of the same type as that shown in Figure 5 but each stage 32 to 35 receives setting signals only from the preceding stage 31 to 34, respectively. Thus, the OR gates 46 to 50 are unnecessary and are omitted in the shift register of Figure 23.

Operation of the shift register of Figure 23 is the same as described hereinbefore for Figure 5 in the "forward" direction with the waveforms illustrated in Figure 6. Thus, the first clock pulse at the clock input CK1 clocks the start pulse SP1 into the flip-flop 35 of the first stage 31. The Q output of the flip-flop 36 is switched to the logic high level and this signal is supplied to a first input of the AND gate 42 of the second stage 32. However, the clock signal at the second clock input CK2 is at the logic low level so that the gate 42 is prevented from passing the logic high level to the set input S of the flip-flop 37 and holds the flip-flop 37 reset.

When the clock signal at the second clock input CK2 goes to the high logic level, the active low reset input RB of the flip-flop 37 no longer holds this flip-flop reset. Both inputs of the gate 42 are at the logic high level so that a logic high level signal is supplied to the active high set input S of the flip-flop 37, which is thus set and supplies a logic high level at its output Q. When the signal level at the first clock input CK1 goes to the logic low level, the first flip-flop 36 is reset and its output Q switches to the logic level to mark the end of the output pulse at the output OUT1. This cycle of events is then repeated for each clock pulse so that the outputs OUT1 to OUT5 produce overlapping clock pulses in turn with the start pulse effectively being shifted towards the final stage of the shift register.

The other bi-directional embodiments described hereinbefore may be similarly modified to provide a uni-directional shift register. Such arrangements have the advantage of

occupying reduced substrate area compared with known types of uni-directional shift registers. Thus, where such a shift register is integrated on the display substrate of a display panel, the size of the panel surrounding the region of the panel displaying images can be reduced and this allows a smaller bezel size for the display panel. Alternatively or additionally, some or all of the saving in area may be used to integrate additional circuits which would otherwise require an increase in the panel area.

CLAIMS:

1. A shift register comprising X stages, where X is an integer greater than three, and Y clock inputs, where Y is an integer greater than two, each stage comprising a reset-over-set flip-flop circuit as defined hereinbefore, each x th stage being arranged to receive set signals from the $(x-1)$ th stage, where $1 < x \leq X$, and each $(nY+y)$ th stage being arranged to receive a reset signal from the y th clock input, where $0 < y \leq Y$ and n is a non-negative integer.
2. A register as claimed in claim 1, in which the first stage is arranged to receive a start pulse from a start pulse input.
3. A register as claimed in claim 1 or 2, in which the reset-over-set flip-flop circuit comprises a reset-set flip-flop and an AND gate having an output connected to a set input of the flip-flop, a first input connected to the y th clock input and a second input connected to the output of the $(x-1)$ th stage.
4. A register as claimed in any one of the preceding claims, in which the reset-over-set flip-flop circuit has a complementary reset input connected to the y th clock input.
5. A register as claimed in any one of the preceding claims, in which each of the stages comprises a level shifter for shifting the level of a reset signal.
6. A register as claimed in any one of the preceding claims, comprising a clock signal generator having Y multiphase outputs connected to the Y clock inputs, respectively.
7. A register as claimed in claim 6, in which the clock signal generator is arranged to supply multiphase clock signals with the clock signals of pairs of adjacent phases overlapping each other.

8. A register as claimed in claim 7, in which the clock signals of non-adjacent phases are non-overlapping.
9. A register as claimed in any one of the preceding claims, in which each xth stage is arranged to receive set signals from the (x+1)th stage.
10. A register as claimed in claim 9, in which the Xth stage is arranged to receive a start pulse from the start pulse input.
11. A register as claimed in claim 9 or 10 when dependent on claim 3, in which the reset-over-set flip-flop circuit comprises an OR gate having an output connected to the second input of the AND gate and inputs connected to the outputs of the (x-1)th and (x+1)th stages.
12. A register as claimed in any one of claims 9 to 11 when dependent on any one of claims 6 to 8, in which the clock signal generator is controllable to supply clock pulses in sequence to the 1st to Yth clock inputs, respectively, or to the Yth to 1st clock inputs, respectively.
13. A register as claimed in any one of claims 6 to 8 and 12, in which the clock signal generator is controllable to supply inactive clock signals simultaneously to the clock inputs.
14. A register as claimed in any one of claims 6 to 8, 12 and 13, in which the clock signal generator is controllable to supply active clock signals simultaneously to the clock inputs.
15. A register as claimed in any one of the preceding claims, comprising an arrangement for converting overlapping output pulses from the stages to non-overlapping pulses.

16. A register as claimed in claim 15, in which the arrangement comprises: a pulse generator for producing timing pulses, each of which has a rising edge after the rising edge of a respective output signal of the register and a falling edge before the falling edge of the respective output signal; and X logic circuits, each xth of which is arranged to perform a logical AND operation on an output of the xth stage and the timing pulses.

17. A register as claimed in claim 16, in which the rising edge of each timing pulse, occurs after the falling edge of the output signal preceding the respective output signal and the falling edge of each timing pulse occurs before the rising edge of the output signal following the respective output signal.

18. A register as claimed in claim 15, in which the arrangement comprises a plurality of logic circuits, each xth of which is arranged to perform a logical AND operation on a direct output of the xth stage and inverted outputs of the (x-1)th and (x+1)th stages.

19. A register as claimed in claim 15, in which the arrangement comprises a plurality of logic circuits, each xth of which is arranged to perform a logical AND operation on a direct output of the xth stage and an inverted output of the (x-1)th or (x+1)th stage.

20. A register as claimed in any one of claims 1 to 14, comprising an arrangement for converting output pulses from the stages to groups of simultaneous pulses.

21. A register as claimed in claim 20, in which the arrangement comprises: a pulse generator for producing timing pulses, each of which overlaps with the output pulses of a respective group of the stages; and X logic circuits, each xth of which is arranged to perform a logical AND operation on the output pulse of the xth stage and the timing pulses.

22. A register as claimed in claim 21, in which the rising edge of each timing pulse occurs after the rising edges of all the output signals of the respective group and the

falling edge of each timing pulse occurs before the falling edges of all of the output signals of the respective group.

23. A register as claimed in any one of the preceding claims, in which Y is equal to three.
24. A register as claimed in any one of the preceding claims, comprising a CMOS integrated circuit.
25. A driver for an active matrix device, comprising a register as claimed in any one of the preceding claims.
26. An active matrix device comprising at least one driver as claimed in claim 25.
27. A device as claimed in claim 26, comprising a liquid crystal display.

ABSTRACT

SHIFT REGISTER

(Figure 5)

A shift register is provided, for example, for use in scan and data line drivers (2, 3) for an active matrix liquid crystal display. The shift register comprises X stages (31-35), where X is an integer greater than 3. A clock signal generator (51) supplies Y-phase clock signals (CK1-CK3), where Y is greater than 2. Each of the stages (31-35) comprises a reset-over-set flip-flop circuit (such as 36, 41, 46). Each intermediate stage (32-34) receives a set signal from the immediately preceding stage output and a reset signal from one of the clock phases (CK1-CK3). In order to provide bi-directional operation, each intermediate stage (32-34) also receives set signals from the immediately succeeding stage output. The clock signal generator (51) supplies clock pulses in a first order for shift register operation in the forward direction and in the reverse order for shift register operation in the reverse direction.

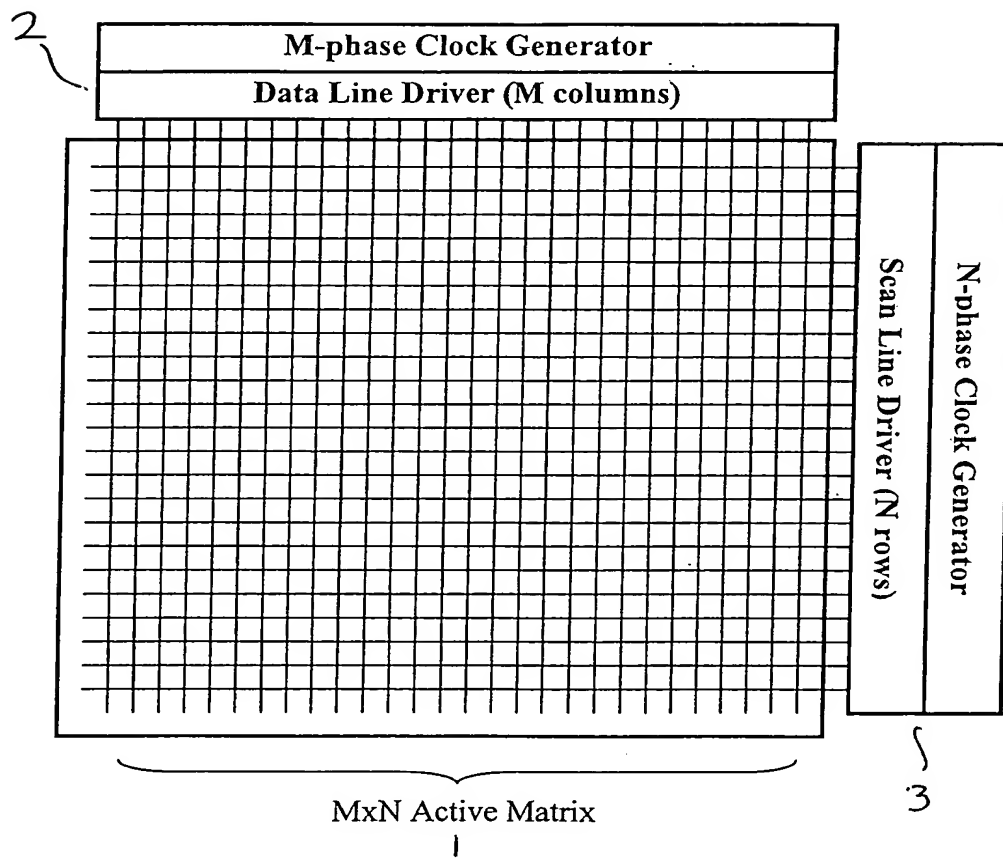


Figure 1

THIS PAGE BLANK (USPTO)

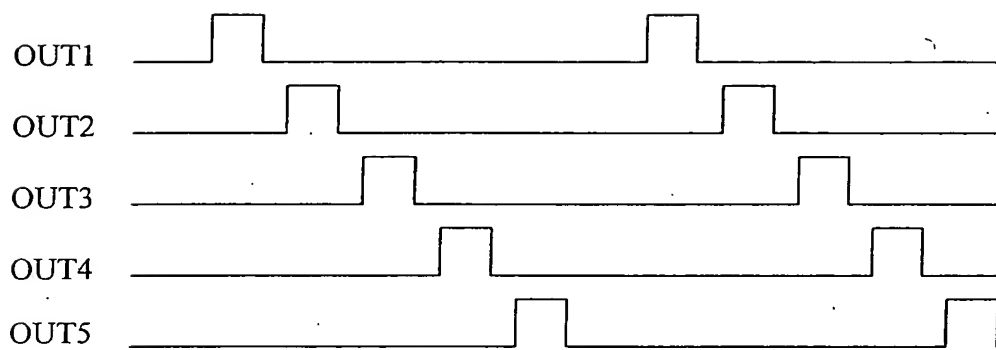


Figure 2

THIS PAGE BLANK (USPTO)



RECEIVED 10/10/10

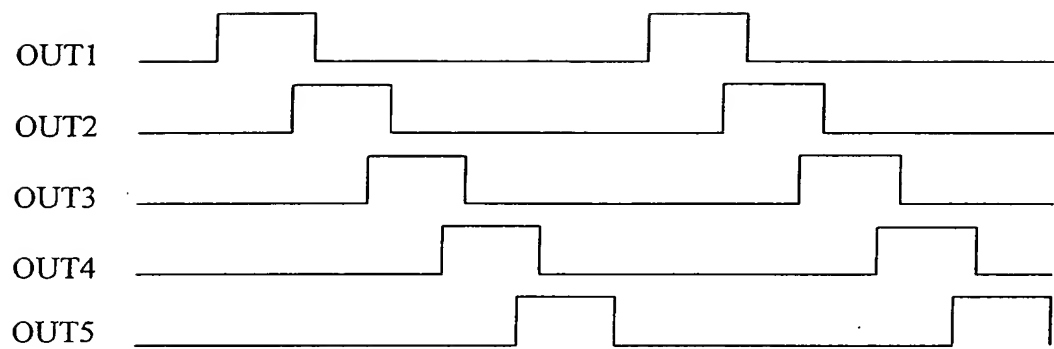


Figure 3

RECEIVED 10/10/10

THIS PAGE BLANK (USPTO)

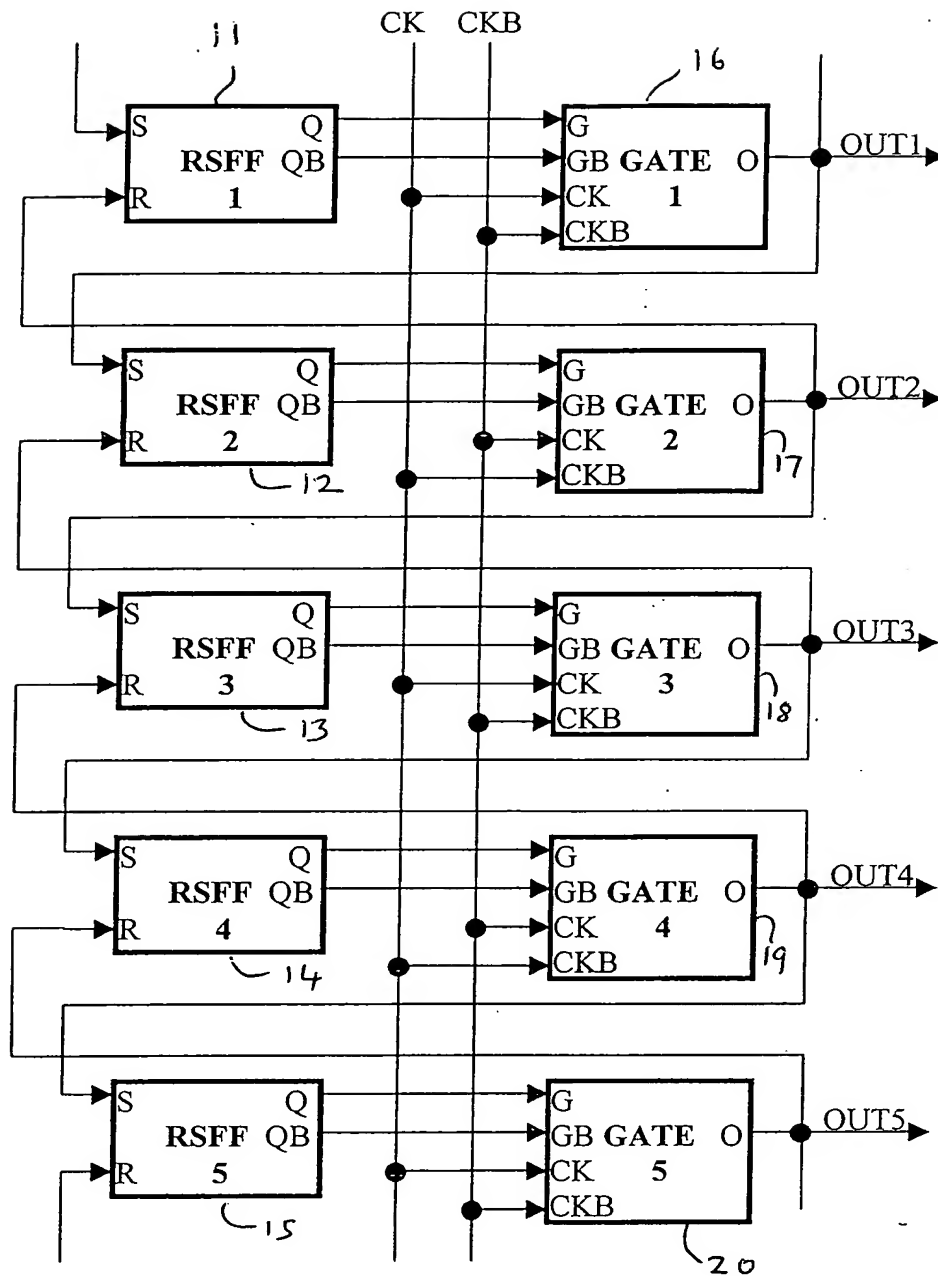


Figure 4

THIS PAGE BLANK (USPTO)

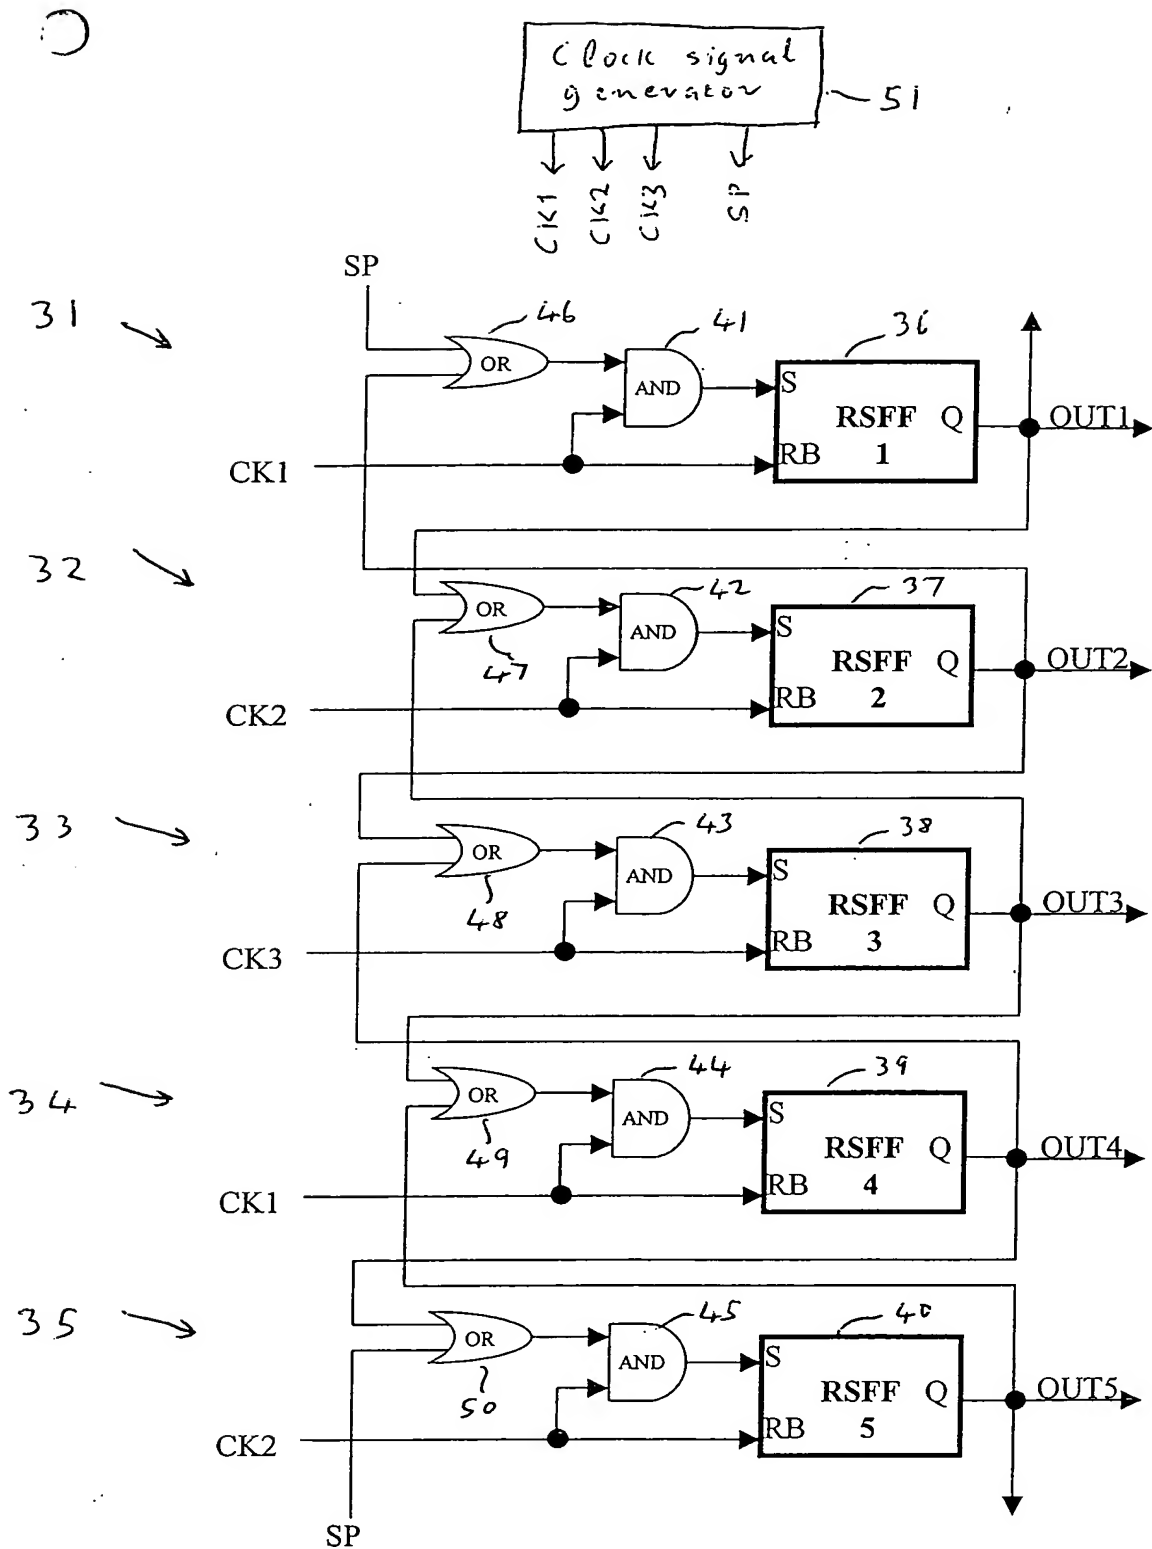


Figure 5

THIS PAGE BLANK (USPTO)

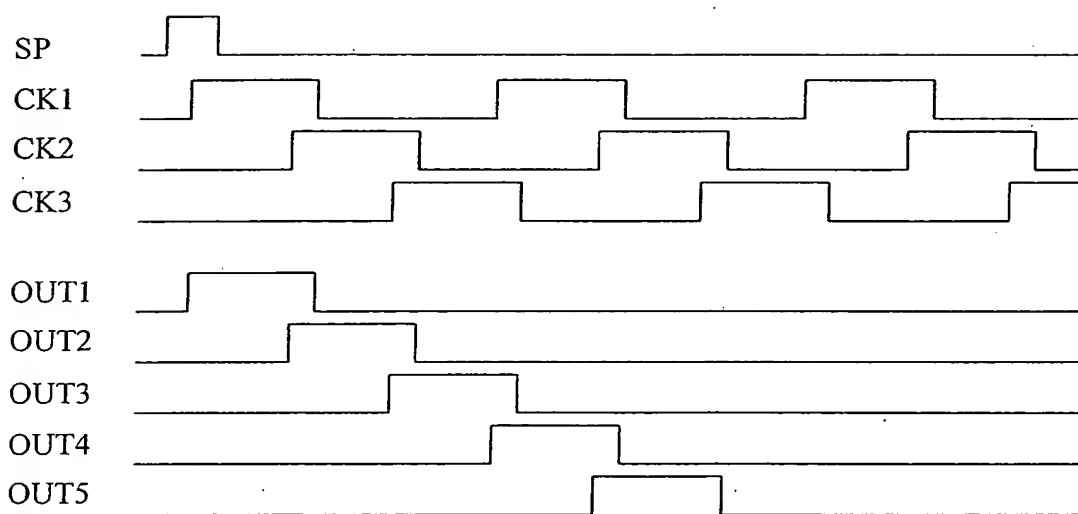


Figure 6

THIS PAGE BLANK (USPTO)

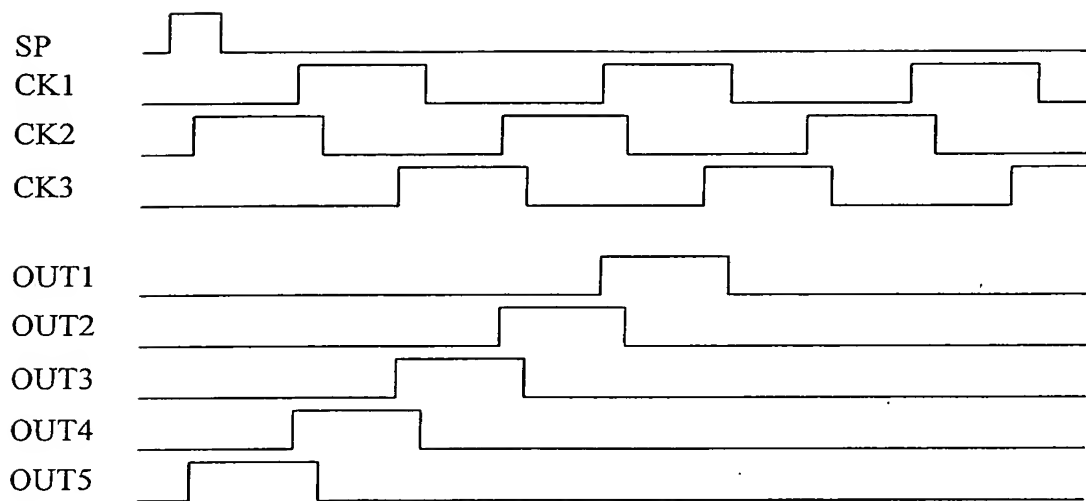


Figure 7

THIS PAGE BLANK (USPTO)

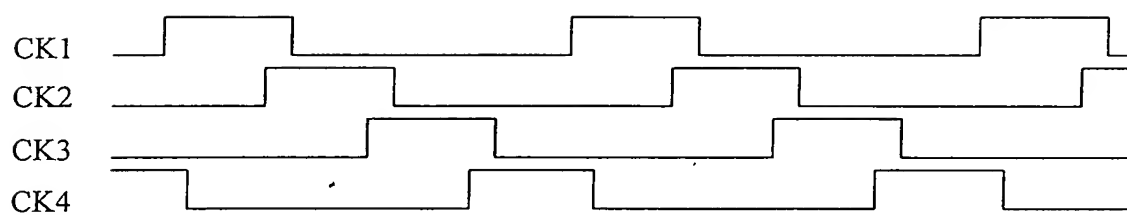


Figure 8

THIS PAGE BLANK (USPTO)

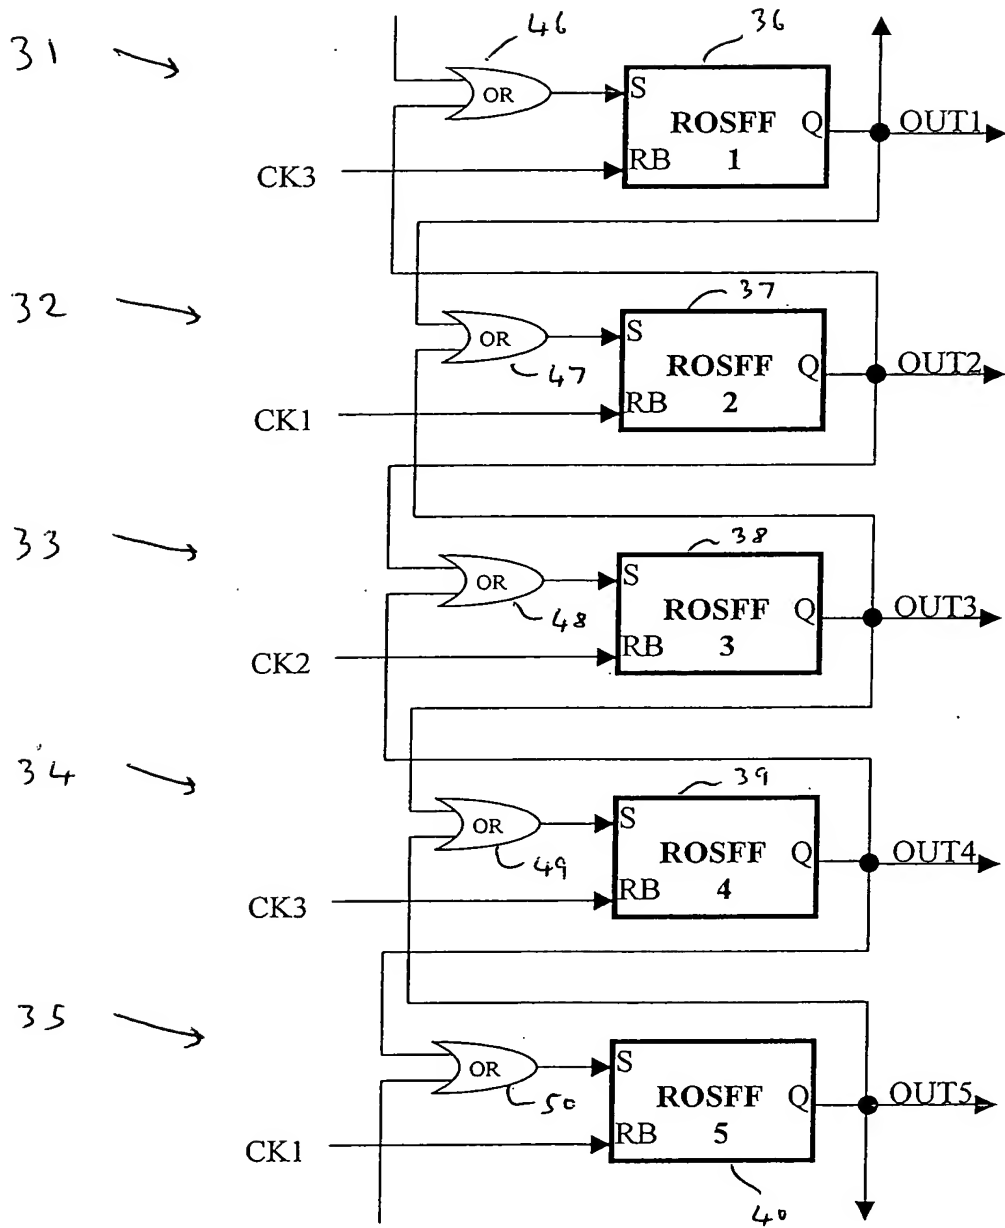


Figure 9

THIS PAGE BLANK (USPTO)

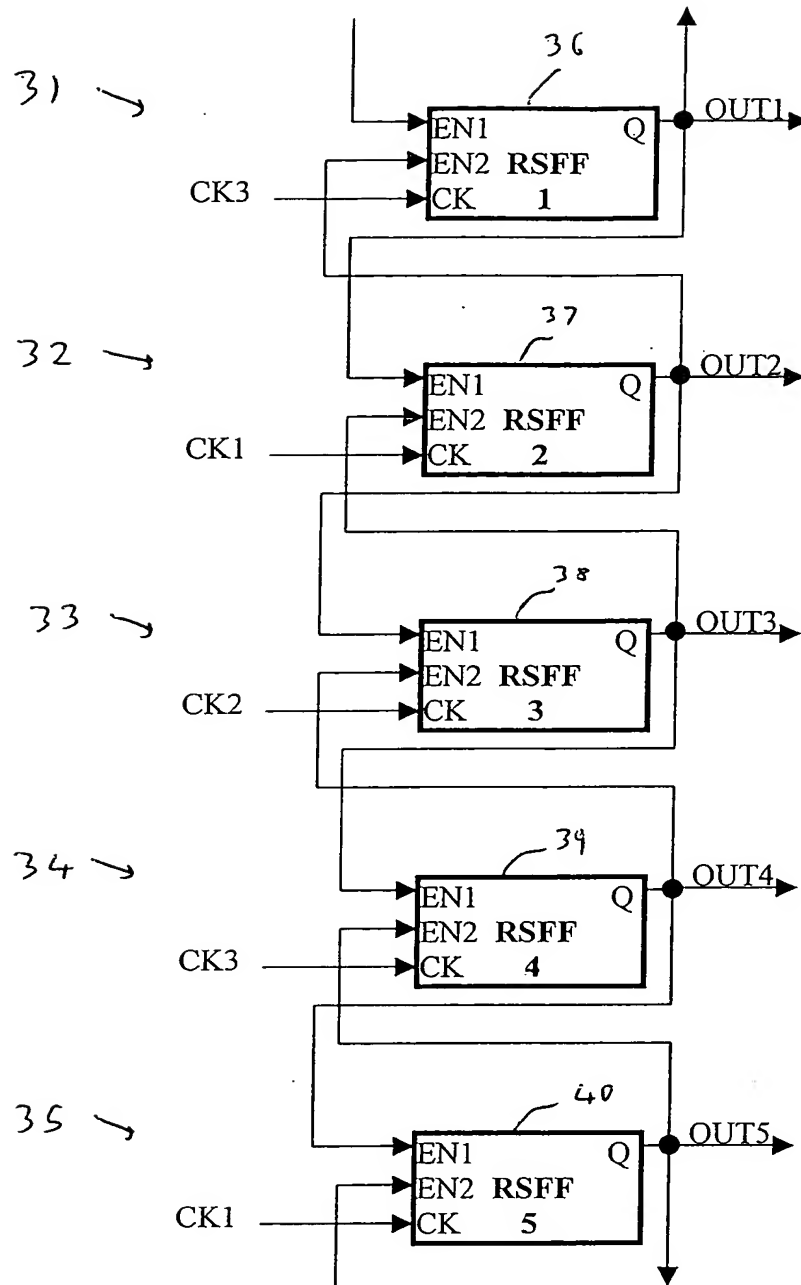


Figure 10

THIS PAGE BLANK (USPTO)

31 ↘

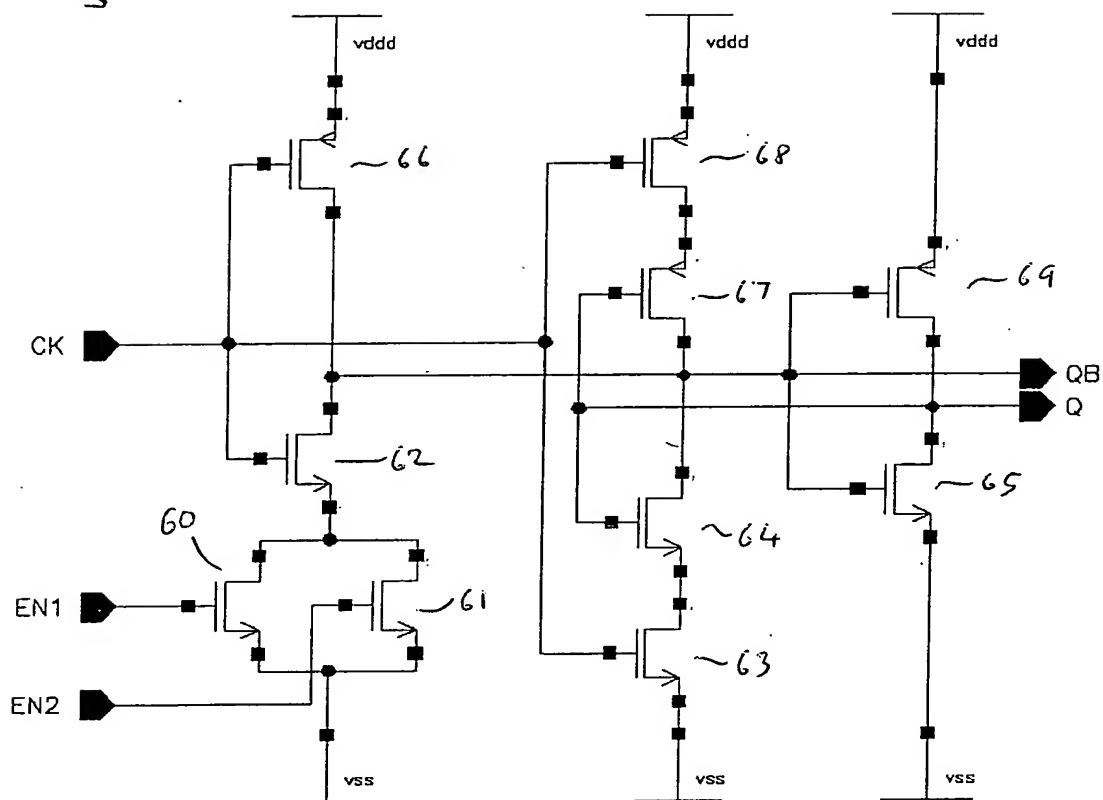


Figure 11

THIS PAGE BLANK (USPTO)

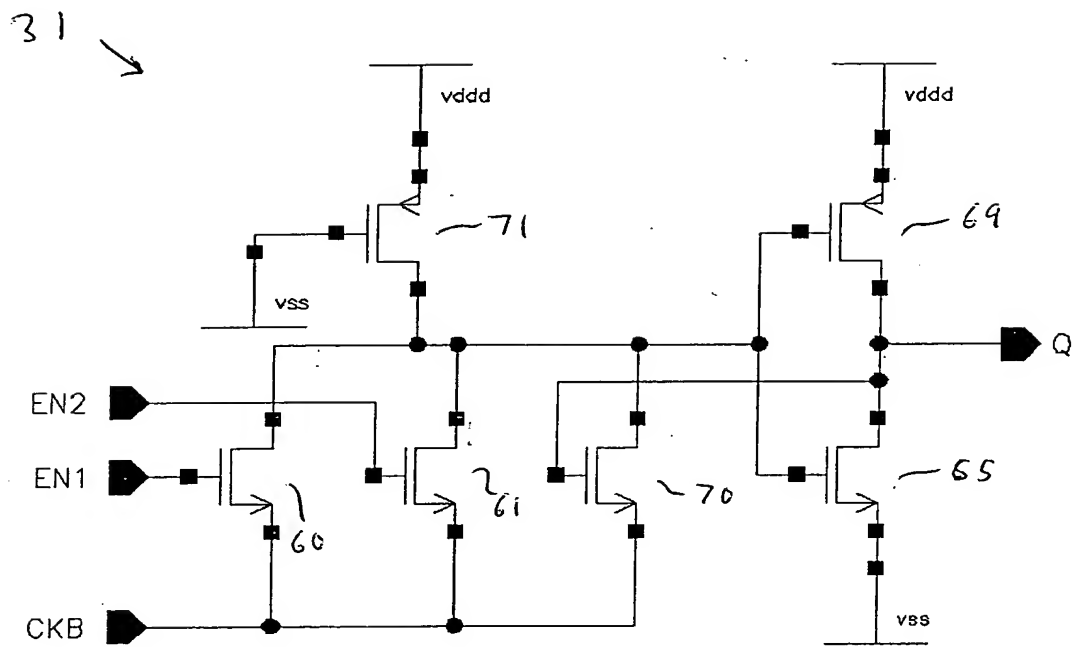


Figure 12

THIS PAGE BLANK (USPTO)

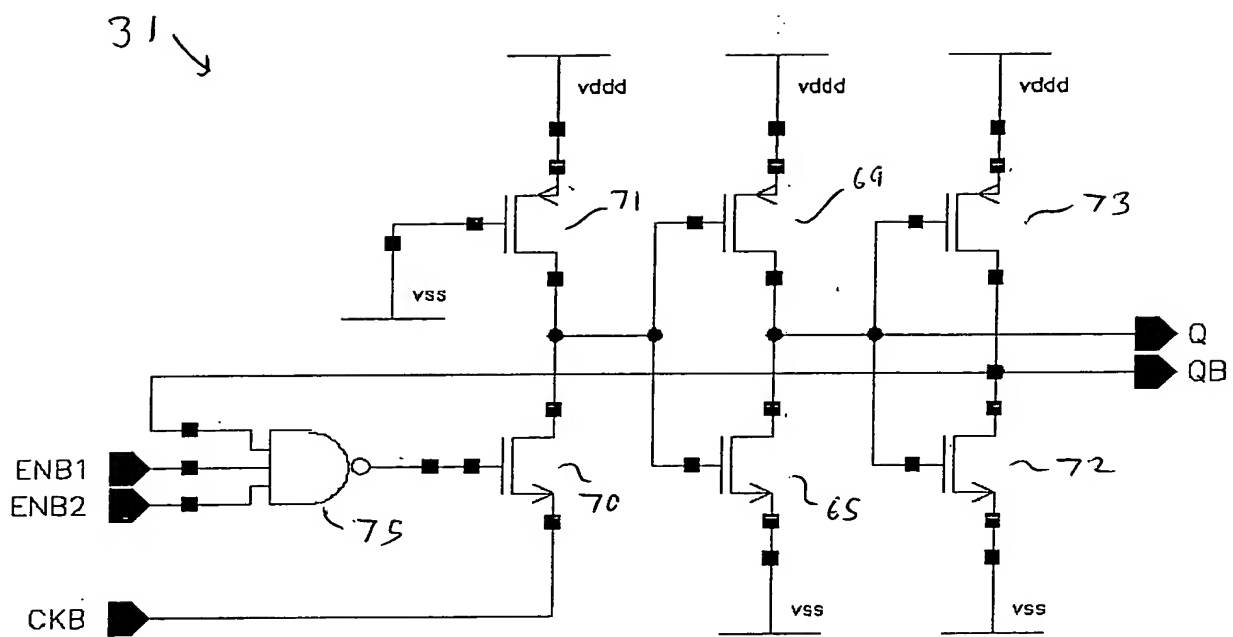


Figure 13

THIS PAGE BLANK (USPTO)

3

DATE 12/11/07

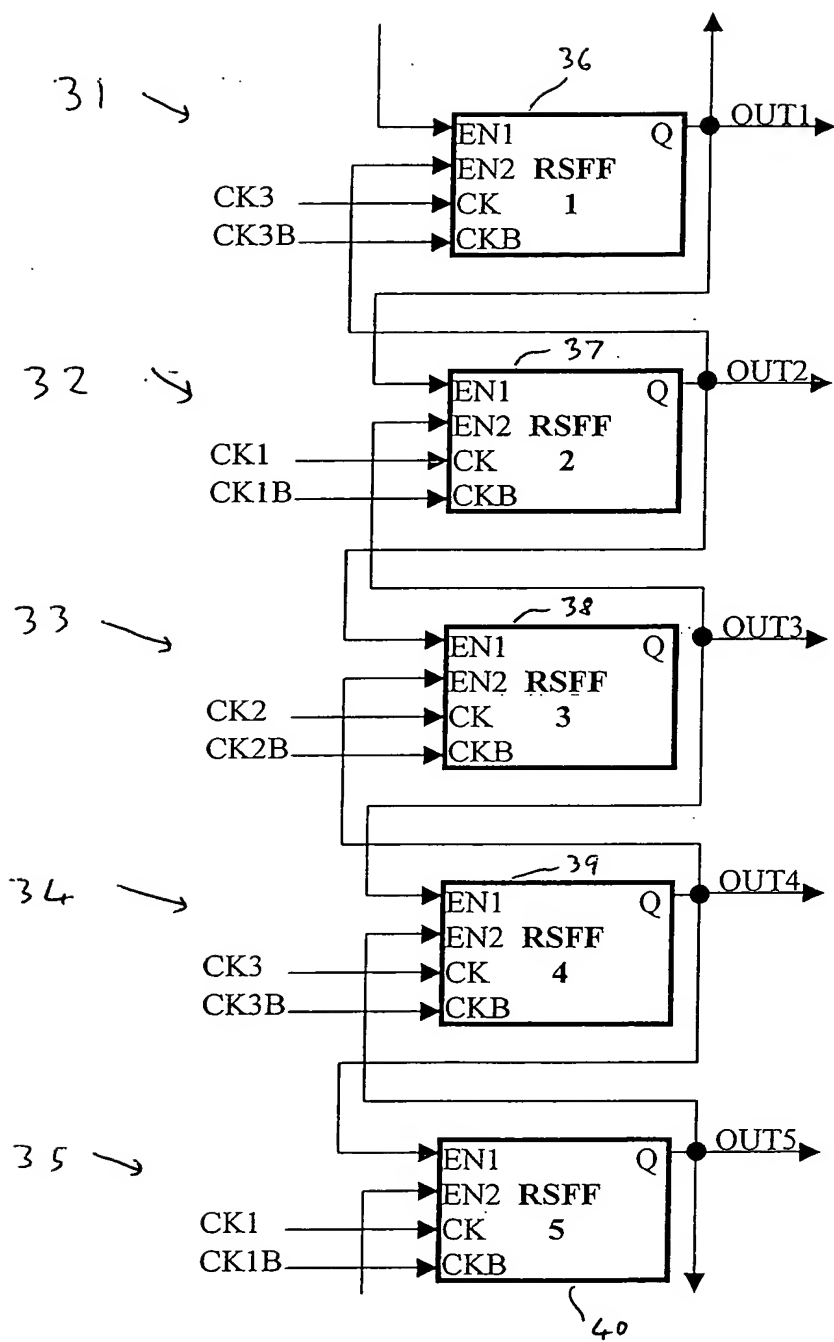


Figure 14

DATE 12/11/07

THIS PAGE BLANK (USPTO)

○

31 →

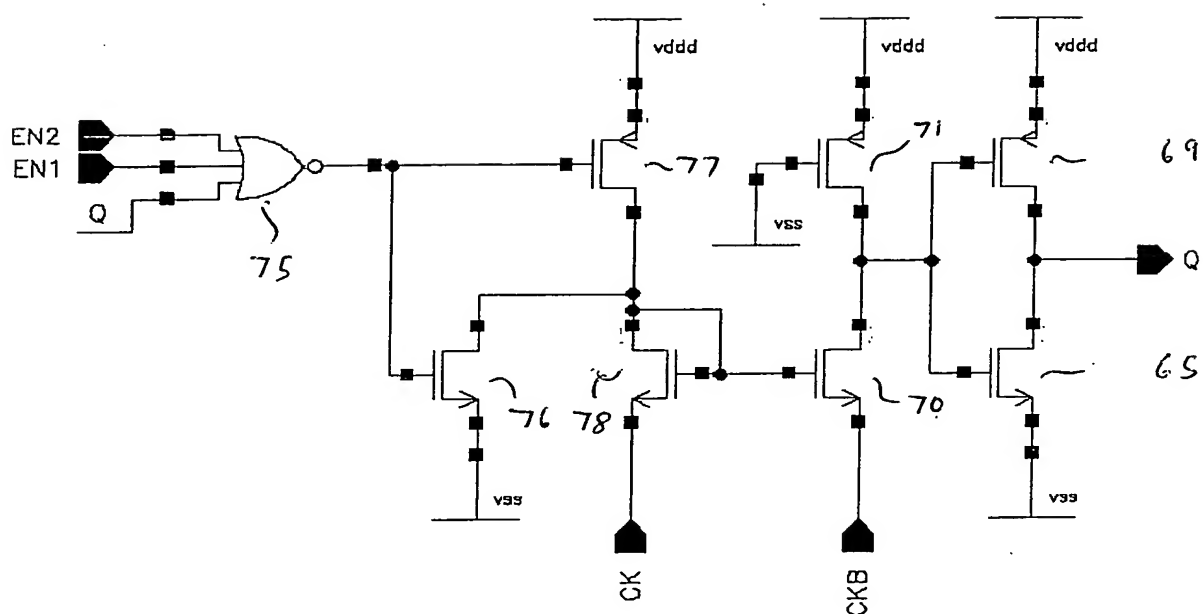


Figure 15

THIS PAGE BLANK (USPTO)

31 ↘

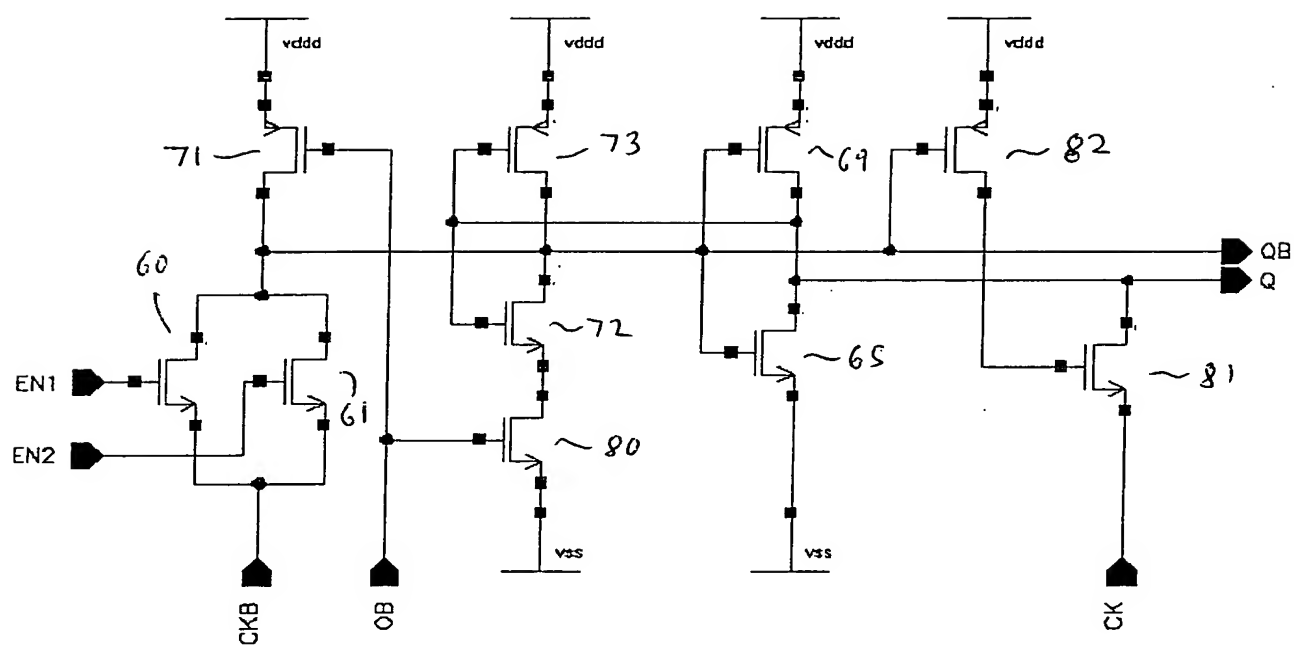


Figure 16

THIS PAGE BLANK (USPTO)

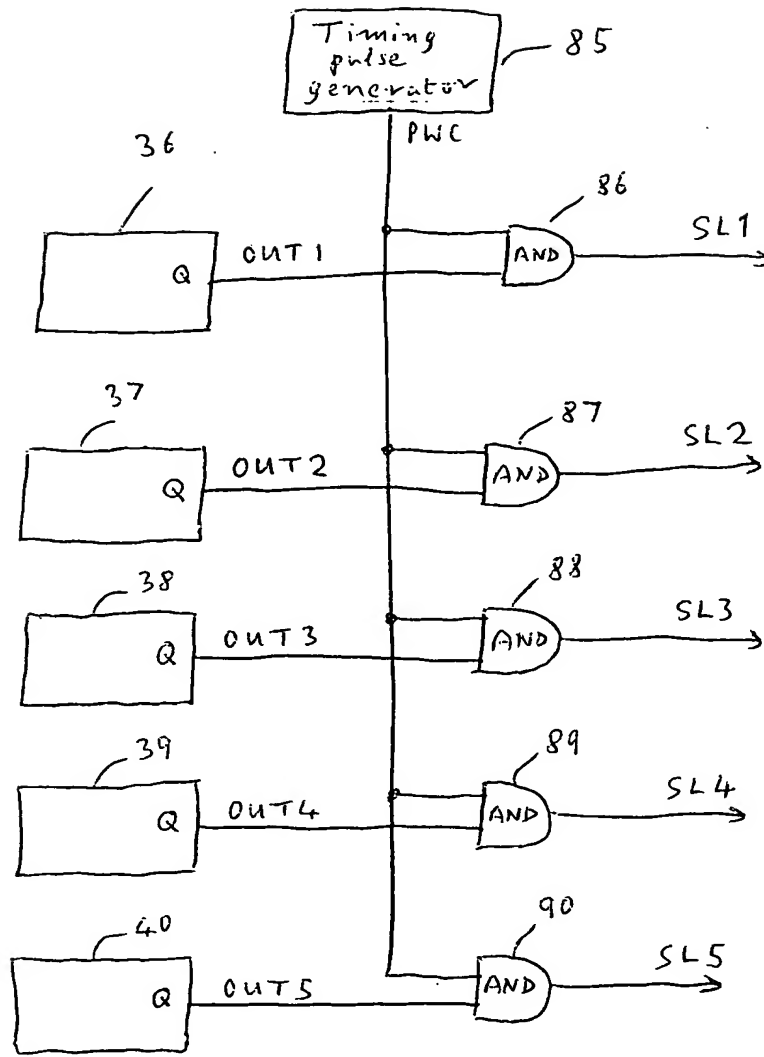


Fig 17

THIS PAGE BLANK (USPTO)

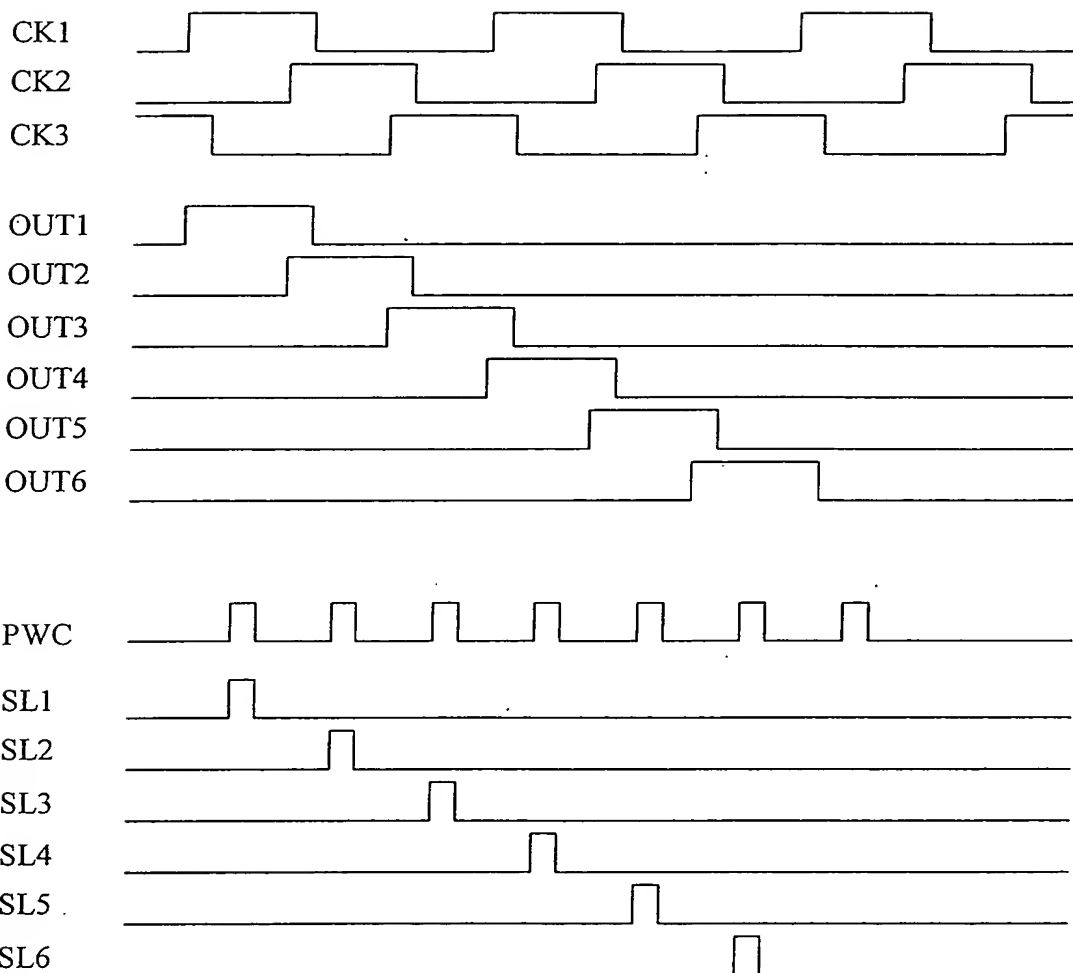


Figure 18

THIS PAGE BLANK (USPTO)

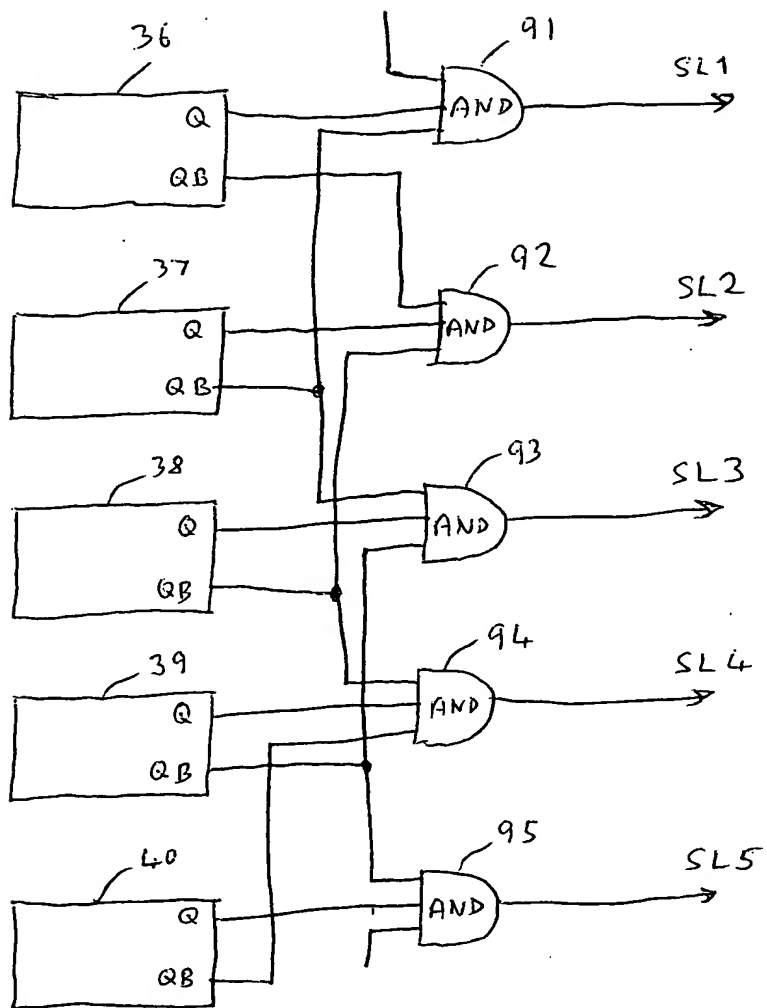


Fig 19

THIS PAGE BLANK (USPTO)

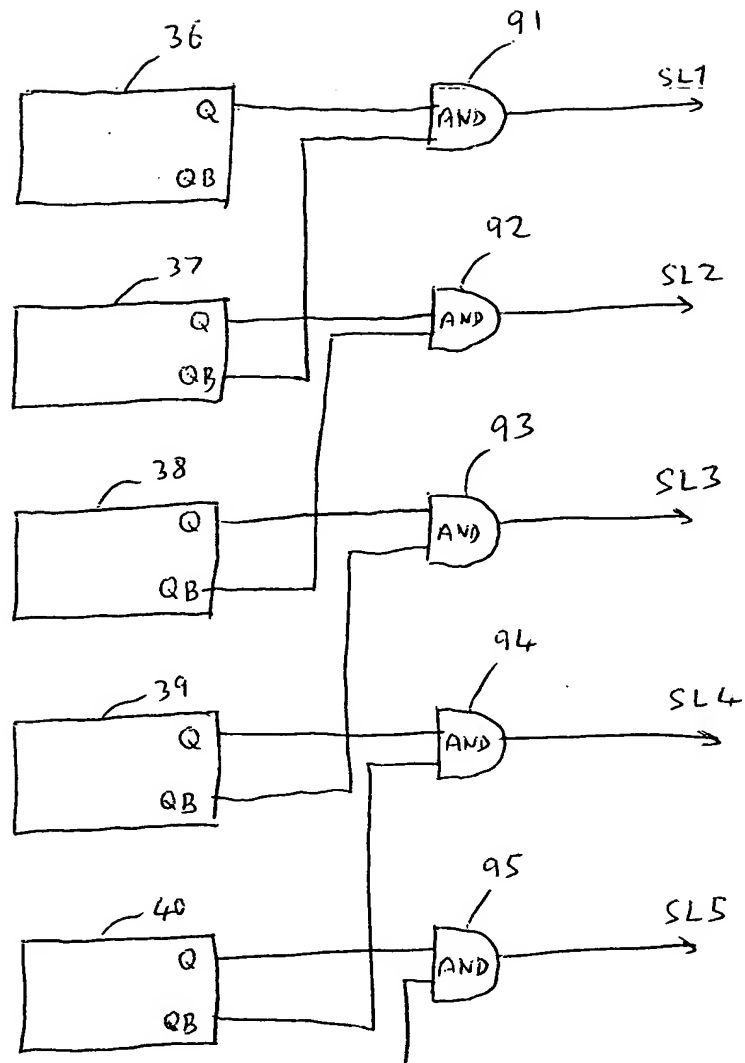


Fig 20

THIS PAGE BLANK (USPTO)

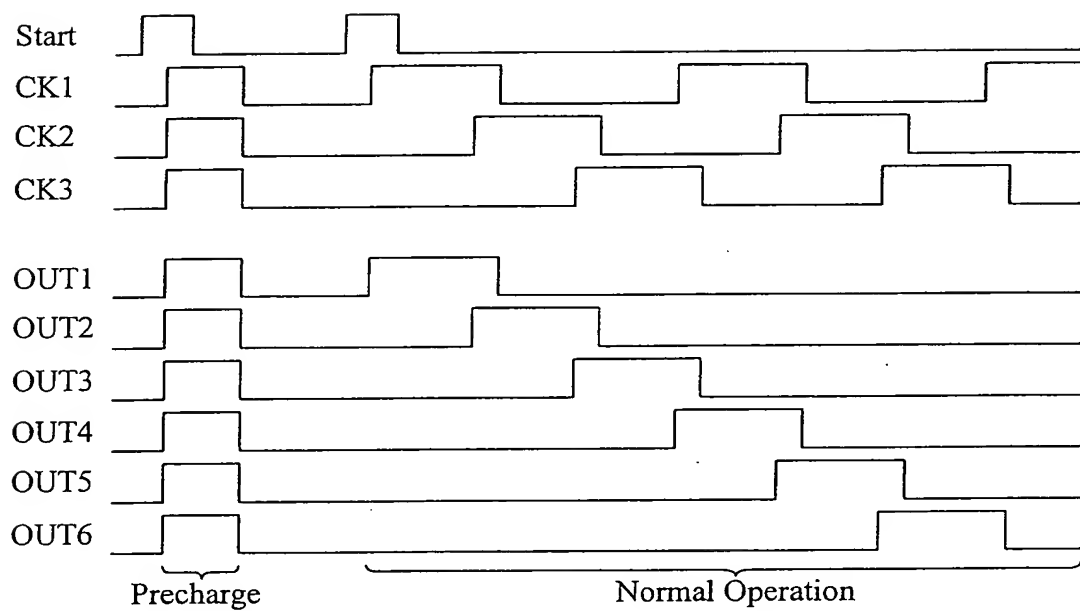


Figure 21

THIS PAGE BLANK (USPTO)

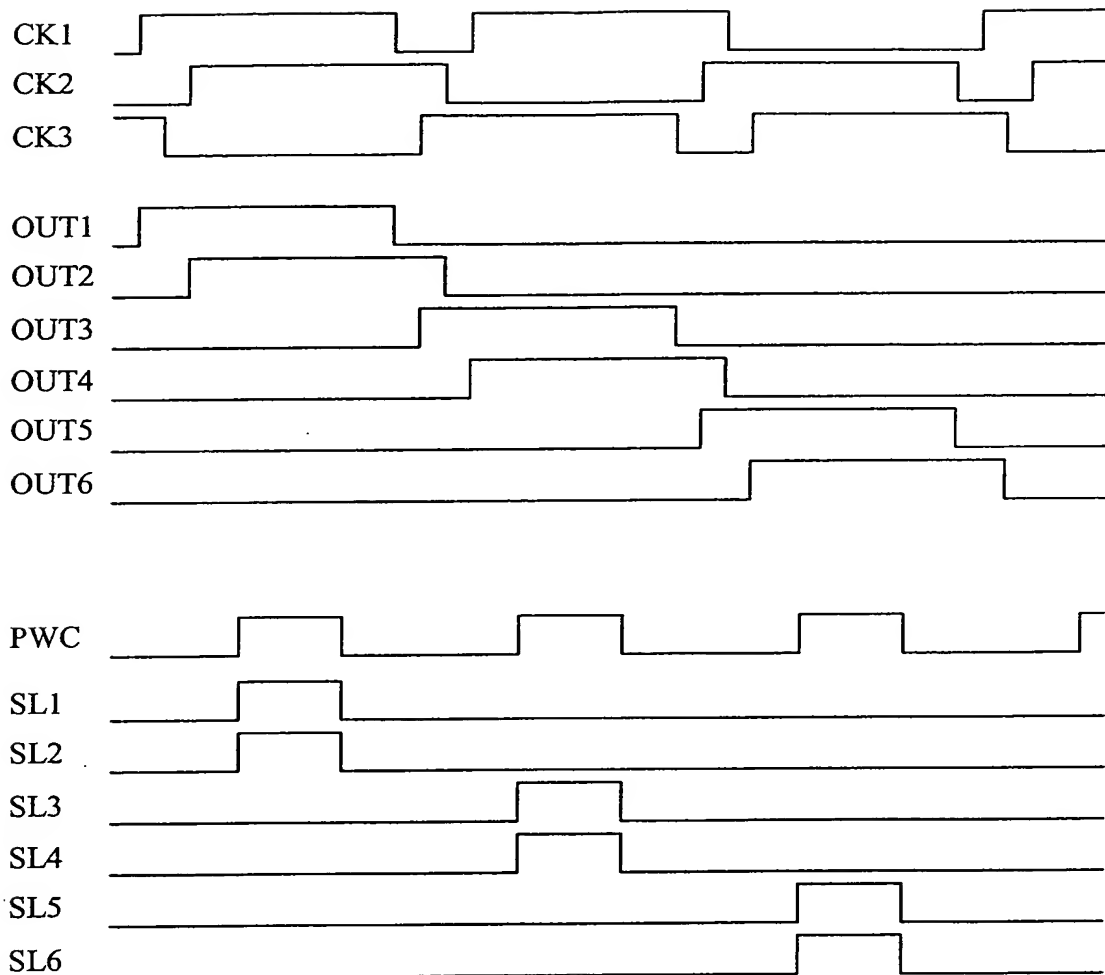


Figure 22

THIS PAGE BLANK (USPTO)

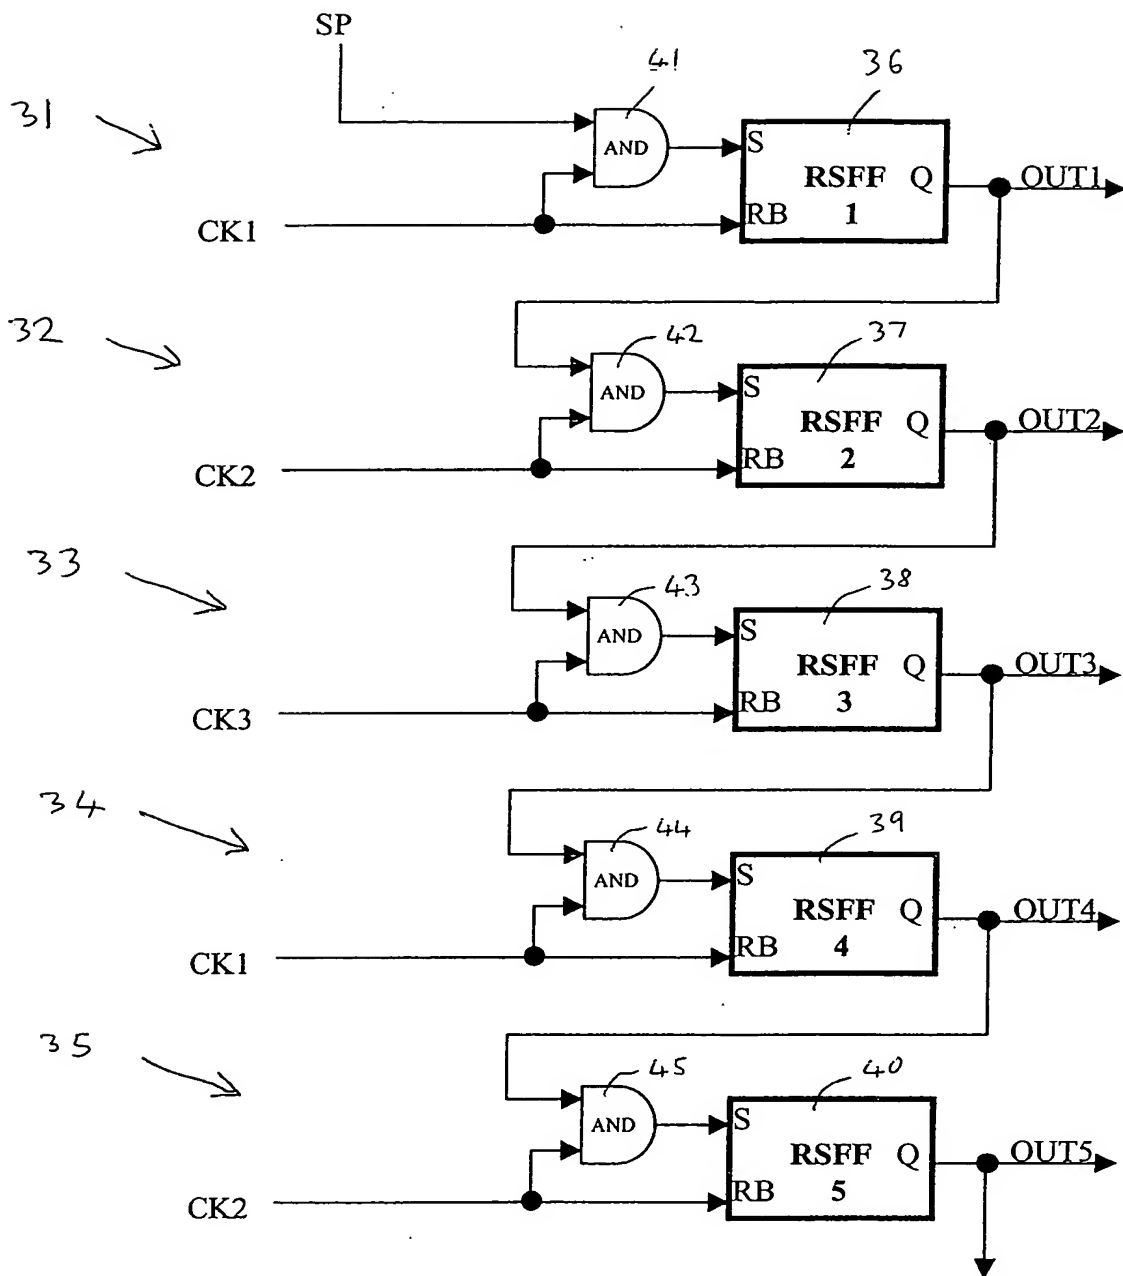


Figure 23

THIS PAGE BLANK (USPTO)